

حلول نقل منكاملة
جودة عالية وأمان

مصادر الجزيرة

(114041)

سلونيد الجير الجانبي اكتروس فتحتين



KSA.P.O.Box 37010 Riyadh 17242








8001240474




info@masader-j.com



www.masader-j.com

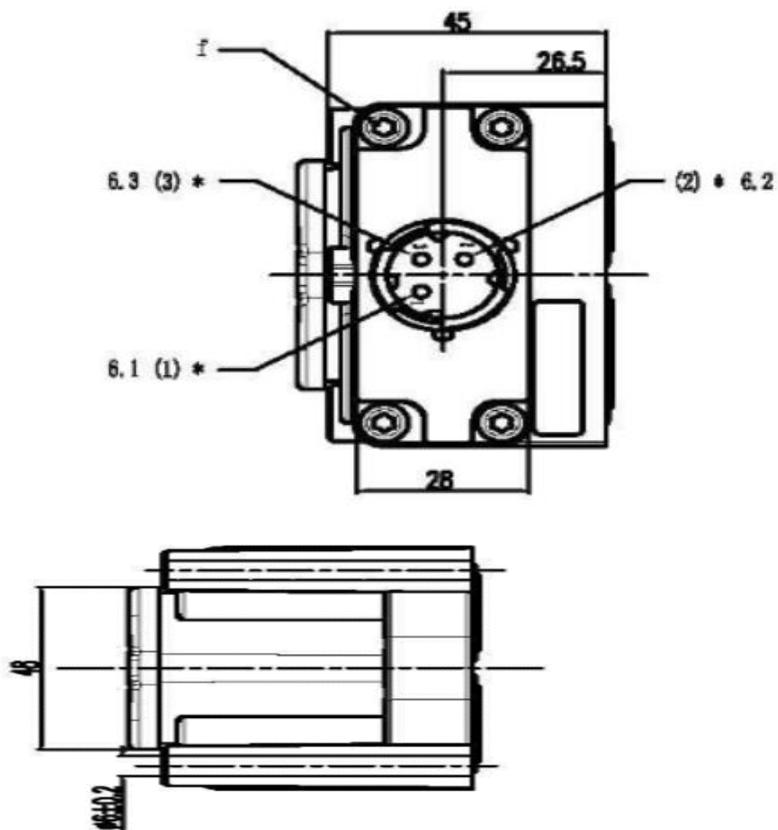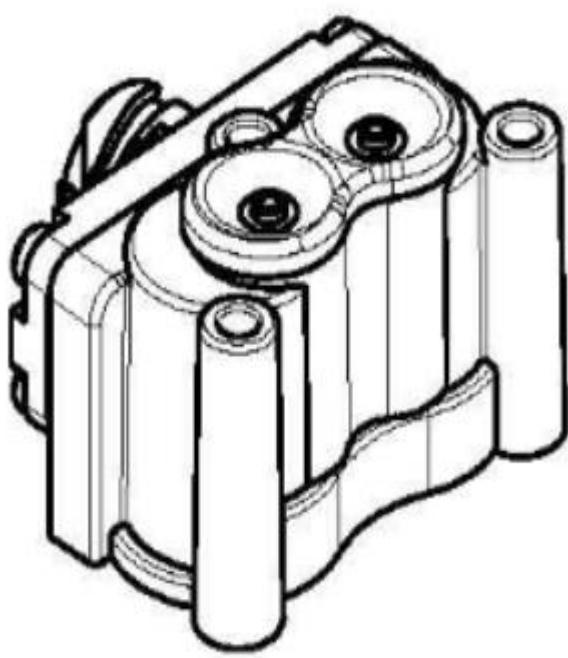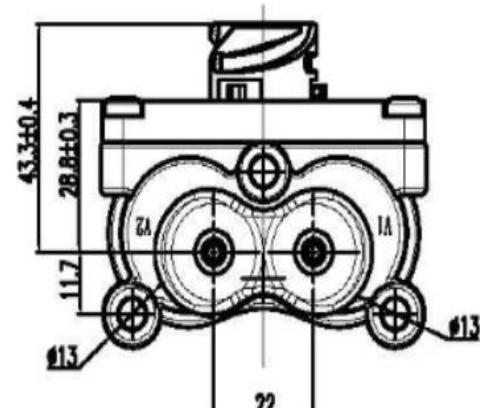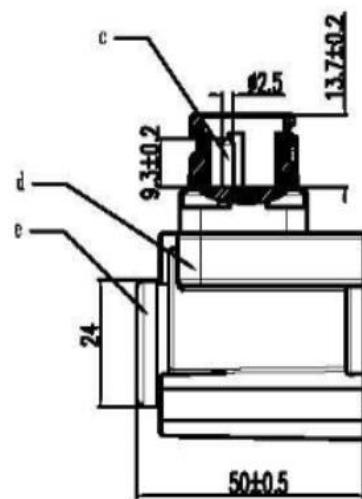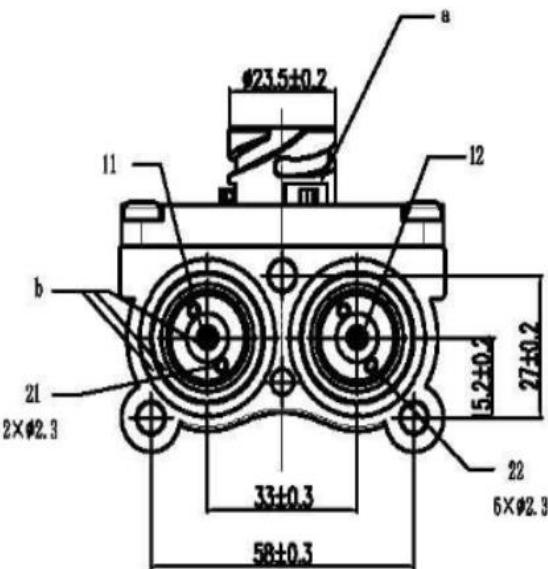

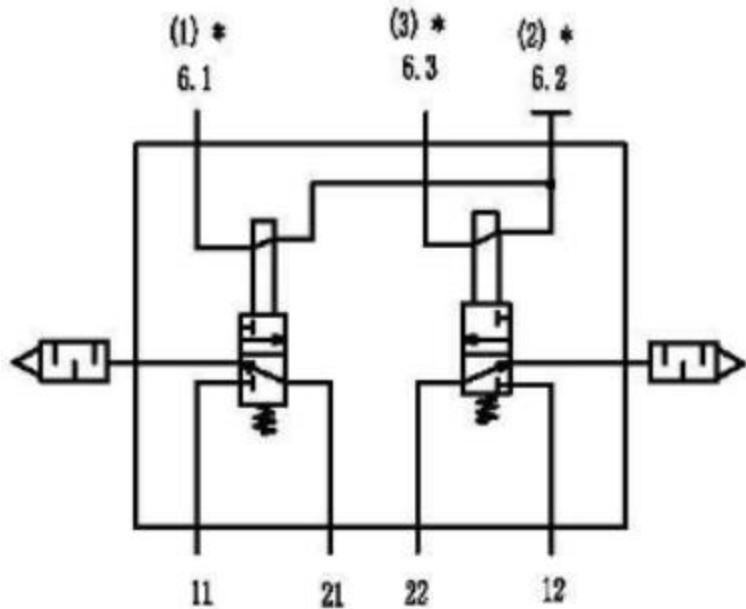

11,12 منفذ التوريد
21,22 منفذ النقل
V1 , V2 منفذ العادم
6.1 , 6.2 , 6.3 التحكم الكهربائي

المتطلبات الفنية:

1. وسط العمل: الهواء (الماء، الزيت، والكحول)
- وسط البيئة: الهواء (يحتوي على الماء والملح الصالح للشرب)
2. نطاق التطبيق الحراري في ظروف البيئة العادية: $40^{\circ}\text{C} \sim +80^{\circ}\text{C}$
- مقاومة الحرارة القصيرة المدى: $\text{max.1h at } 110^{\circ}\text{C}$
3. الضغط العامل (المزود): $P_e=5\text{-}12.5\text{bar}$
- الضغط الديناميكي الأقصى: $P_e=20\text{bar}$
4. نوع التيار: تيار مستمر DC
5. متطلبات الصيانة: لا حاجة لذلك. الجهد الكهربائي المستخدم: 24V+6V-4V
6. شروط الأستخدام: التشغيل المستمر
7. تصنيف تيار درجة حرارة الغرفة: $IN=0.2\text{A}$



سلونيد الجير الجانبي اكتروس فتحتين

الصورة



KSA.P.O.Box 37010 Riyadh 17242



8001240474



info@masader-j.com



www.masader-j.com





KSA.P.O.Box 37010 Riyadh 17242

8001240474

info@masader-j.com

www.masader-j.com



الشركة حاصلة على البايزو

ISO



شركة مصادر الجزيرة التجارية
Masader Al-Jazeera Trading Co.

Integrated transportation solutions

High quality and safety

Masader AL-Jazeera

(11401)

Solenoid Valve



KSA.P.O.Box 37010 Riyadh 17242

8001240474


info@masader-j.com


www.masader-j.com



الشركة حاصلة على البايزو



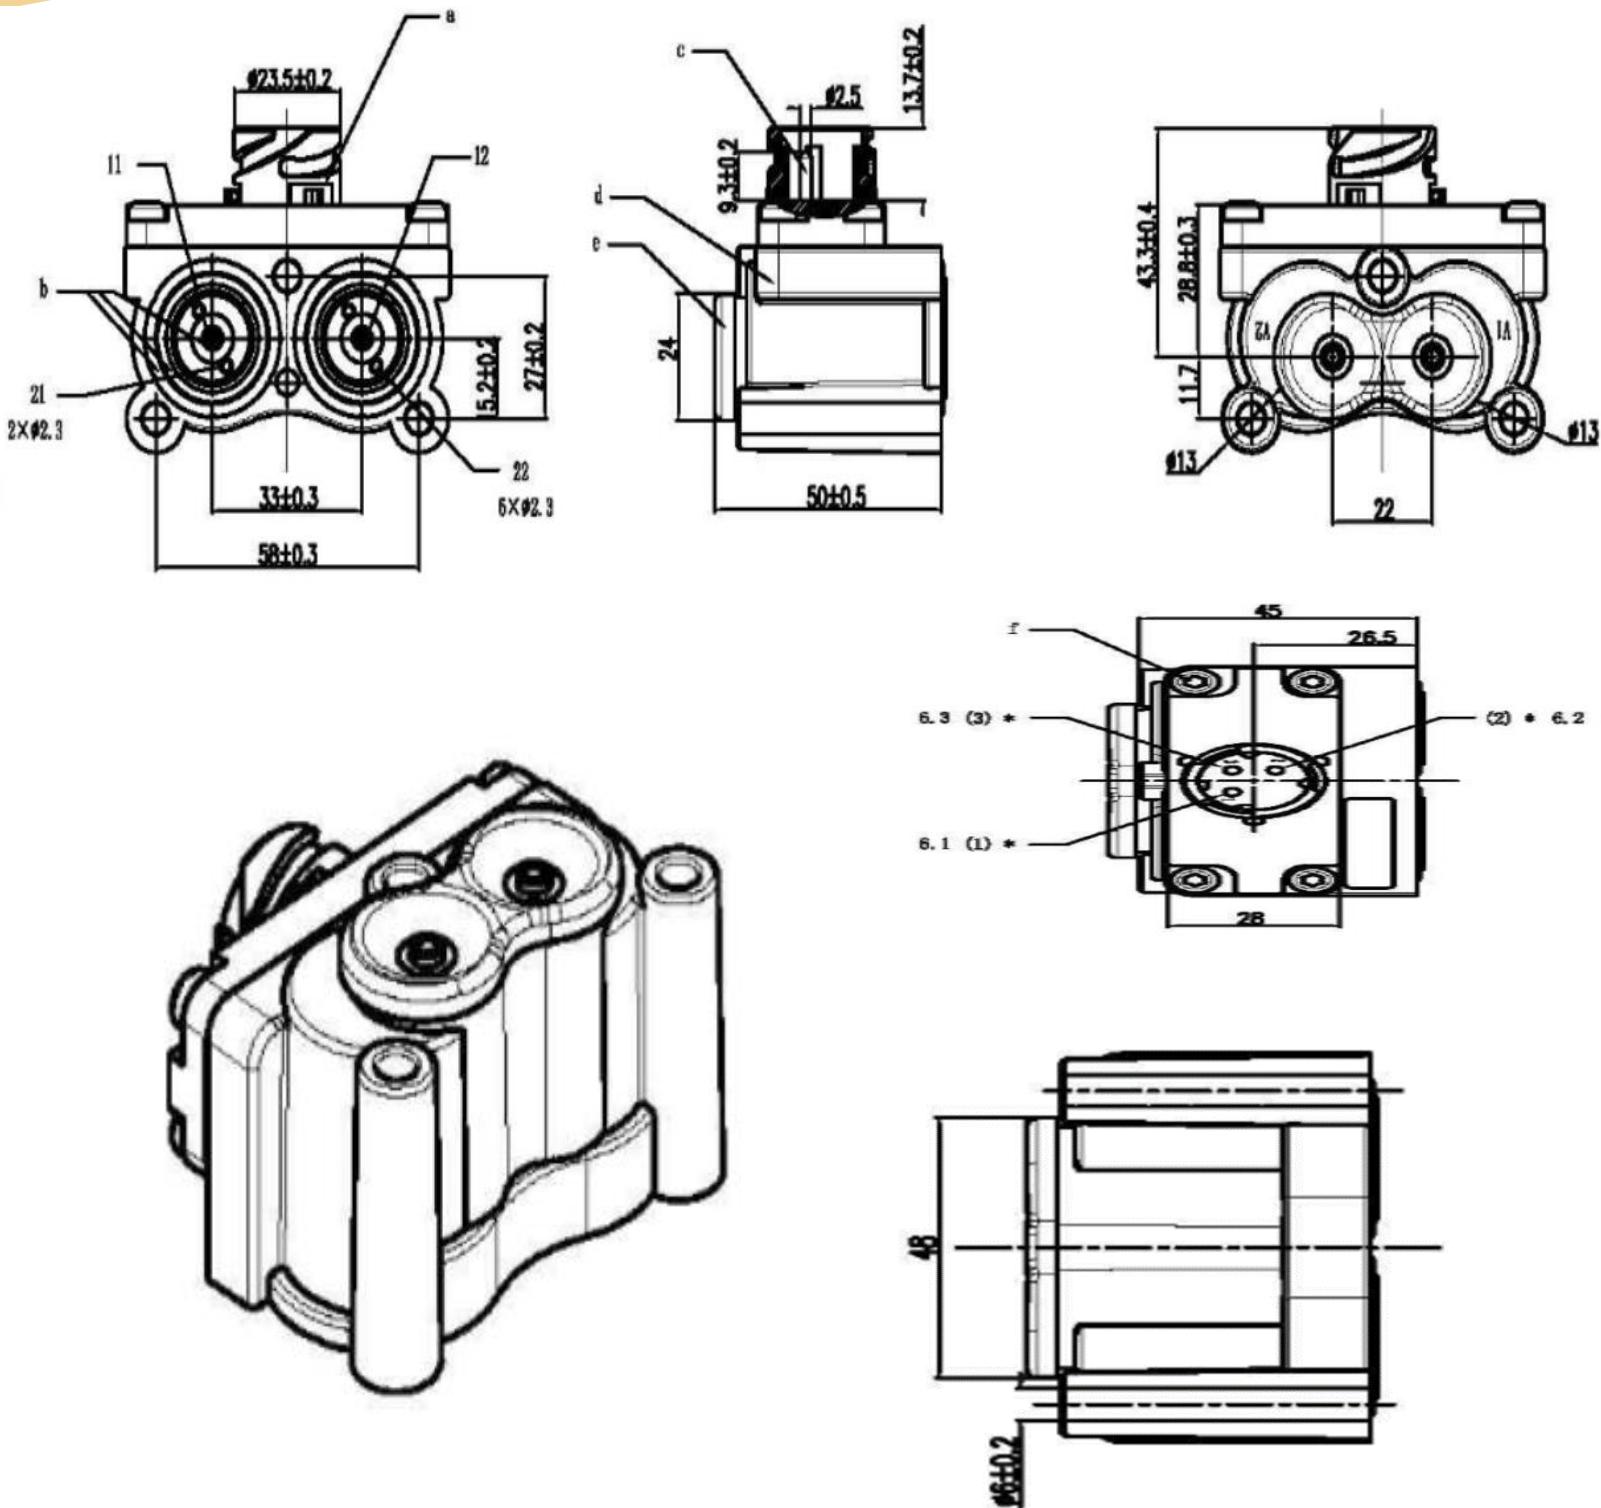

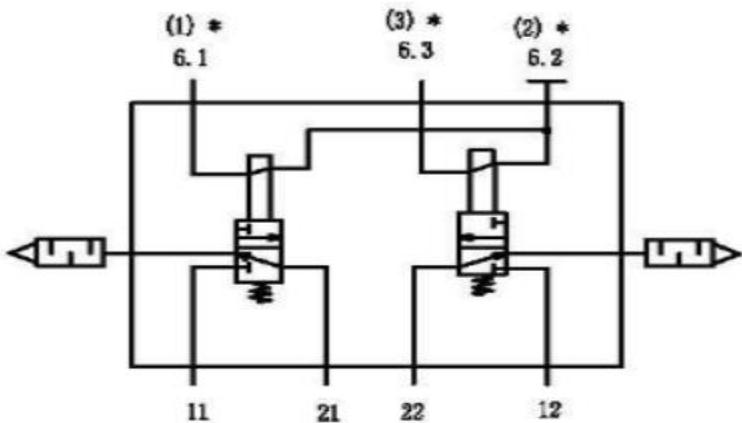

- 11,12 Supply
- 21,22 Transmission
- V1, V2 Exhaust
- 6.1, 6.2, 6.3 Electrical control

Technical requirements

- 1 – Working medium: Air (water, oil, and alcohol)
 - Environmental medium: Air (containing water and drinking salt)
- 2 – Thermal application range under normal environmental conditions: -40 °C~+80 °C
 - Short term heat resistance: max.1h at 110 °
- 3 – Working pressure (supply): Pe=5-12.5bar.
 - Maximum dynamic pressure: Pe=20bar
- 4 – Current type: DC
- 5 – Maintenance requirements: No need Working voltage: 24V+6V-4V
- 6 – Usage conditions: Continuous operation
- 7 – Room temperature rated current: IN=0.2A



Solenoid Valve

Photo





شركة مصادر الجزيرة التجارية
Masader Al-Jazeera Trading Co.



For more Products & Services
Visit our Web site :

www.masader-j.com



KSA.P.O.Box 37010 Riyadh 17242

8001240474

info@masader-j.com

www.masader-j.com



الشركة حاصلة على البايزو

